



# SCENIUS PROFILE

MAXIMUM VERSATILITY OF USE FOR A HIGHER QUALITY LIGHT

Scenius Profile is the new beam shaper at the top of the Claypaky moving head range. The optical reflector has been designed specifically for this product, in order to make the projection perfectly uniform across the whole beam opening, avoiding the typical hotspot effect of many spotlights.

This advanced optics and the 1400W Osram discharge lamp provide very high light output and CRI. The fixture produces a 6500 K color temperature; the white and colored light produced are of the highest quality. The colors may be added very smoothly and linearly and cover a broad spectrum, even including pastel shades,

thanks to a CMY system, a 7-color wheel and a linear CTO filter. Thanks to its wide 8°-50° zoom, Scenius Profile is perfect for every set. A modern focus tracking system concentrates maximum luminous efficiency precisely on the effect you wish to project, and the focus may be set to be fully automatic.

Its framing system consists of 4 independent overlapping blades that create shapes of all sizes, not just quadrangular, but also triangular. It works simultaneously on four different focal planes and the exclusive "curtain effect" allows gradual total closure of the shape using any one of the four blades. The shape made

may also be turned around itself up to an angle of 90°, either to change its orientation or keep it fixed as the light beam moves. The framing opportunities are further enhanced by using a fast, highly precise and accurate iris, allowing users to transform the projected light linearly into circular shapes.

The Scenius has a soft-edge frost filter (particularly useful on gobos), and a newly developed frost filter for a highly effective washlight effect. Other features include 14 interchangeable gobos – 6 rotating and 8 fixed – a 4-facet rotating prism, and stop-strobe effect.

## SPECIFICATIONS

- 1400W Osram discharge lamp
- 6500 K output color temperature
- Very high CRI
- New optical reflector to ensure perfectly uniform beam projections
- 8°- 50° zoom
- Focus tracking system
- CMY System + Linear CTO
- 7-color wheel
- Framing System operating on 4 focal planes
- Framing System indexing on 90°
- 14 gobos (6 rotating + 8 fixed)
- 4-facet Rotating Prism
- 16 blades fast Iris
- Variable "soft edge" frost
- Variable flood frost
- Very precise 0-100% dimmer
- Fast stop/strobe effect
- Light can be run at 1400W or 1200W
- Art-Net / RDM

## WEIGHT AND DIMENSIONS


■ 39.5 Kg (87 lbs)

mm (LxWxH): 410 x 442 x 760

inches (LxWxH): 16.14 x 17.4 x 29.92

## FRAMING SYSTEM

Scenius Profile features a precision micromechanics framing system that ensures perfect repeatability and does away with continuous manual adjustments.

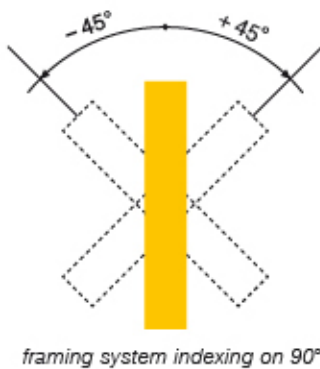

square



rectangle



diamond



triangle



slice



curtain 1



half circle



curtain 2



open curtain



ribbon



square-corner  
trapezium



trapezium